





EUT 60 UP TO 30 CYCLES/HOUR

400/50/3 + N + E 15.5KW

BOOSTER 9.5KW

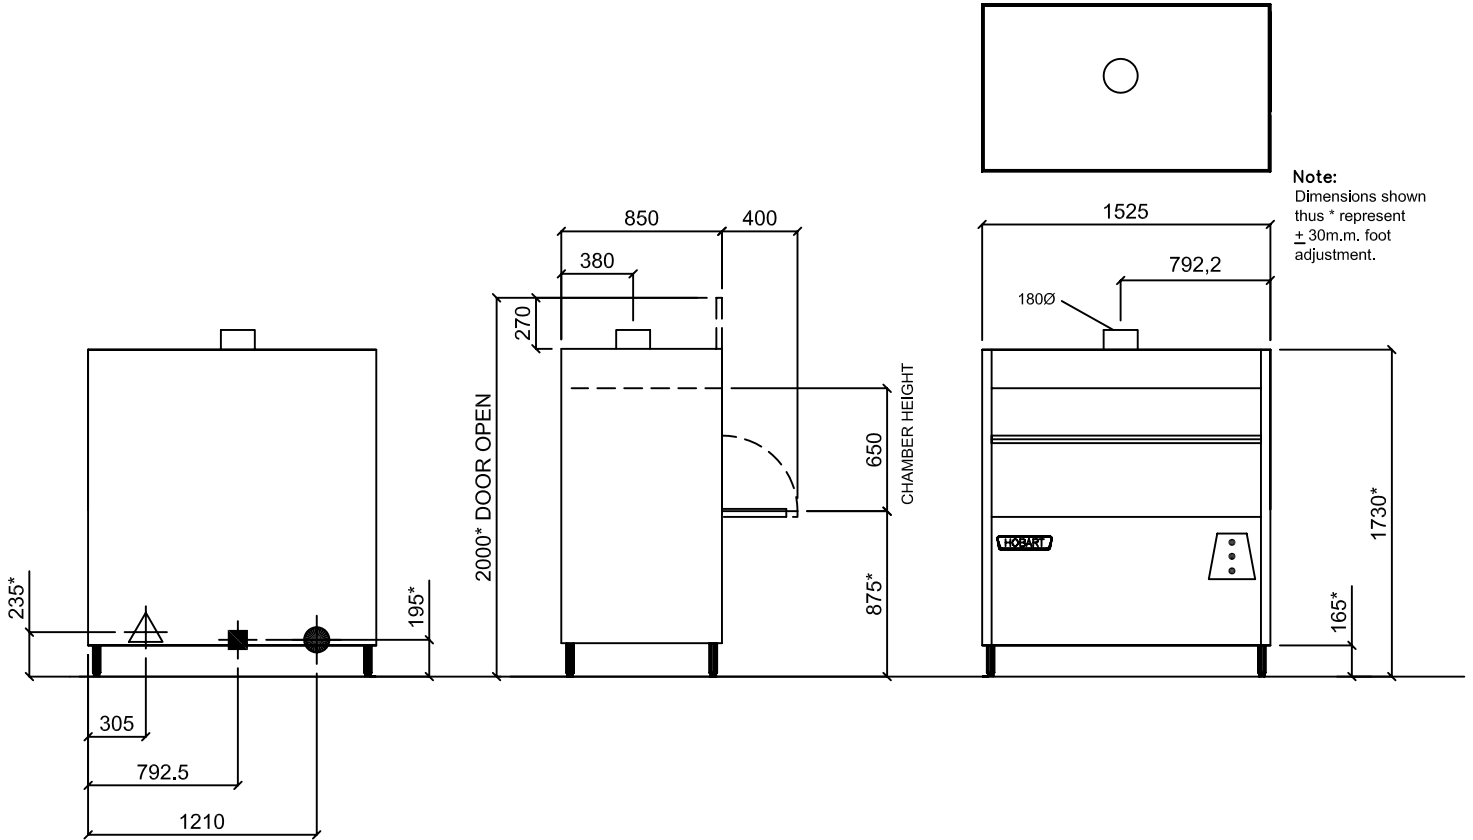

 <p>3</p>	<p>Electrical connection 400/50/3 + N + E 15.5KW Fuse: 30AMPS/PHASE</p>
 <p>2</p>	<p>Water supply: Warm water 50°C to 55°C - 0.5 to 4.0 BAR pressure Water supply pipe 22m.m. (minimum) Machine connection 1.9 metres flexible hose 12m.m. inside diameter with 3/4" B.S.P. female termination Machine supplied with Class `A` Air Gap Recommended maximum water hardness 2 to 8° Clark Initial tank fill 130 litres Rinse water usage 8.0 litres per cycle maximum usage 240 litres per hour</p>
 <p>1</p>	<p>Drain - Gravity at low level and no higher than exit point on machine Peak flow rate 30 litres/min</p>
	<p>Installation should comply with all National and Local codes of practice</p>
	<p>RIGHT TO MAKE NECESSARY CHANGES IS RESERVED</p>

