



# ELECTRO MECHANICAL CONVECTION OVEN WITH HUMIDIFIER HCLH-1012EH-11

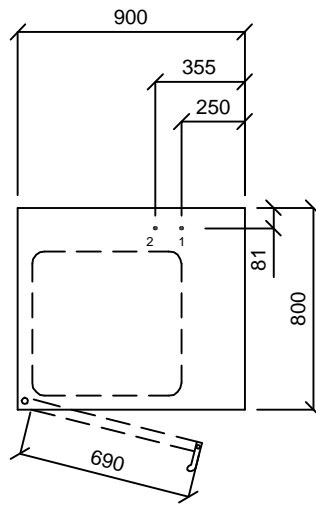

ALL SERVICES ENTER  
FROM UNDER UNIT

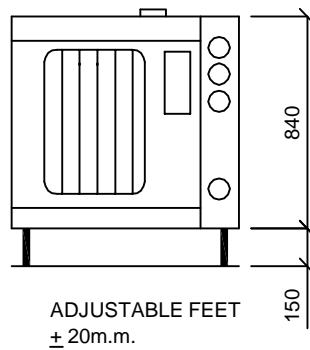

ADJUSTABLE FEET  
± 20m.m.

1 - ELECTRICS	400/50/3 + N + E
RATING	18.0kW
FULL LOAD CURRENT	26amps
FUSE AT	32amps/PHASE
2 - WATER CONNECTION	3/4" B.S.P. 0.5 TO 6 BAR FROM A POTABLE SUPPLY NOT A BASE EXCHANGE WATER SOFTENER. COLD MAX 7° CLARK
DRAIN CONNECTION	NONE WATER IS FOR HUMIDIFICATION PROGRAM ONLY AND EVAPORATES DURING COOKING CYCLE

