

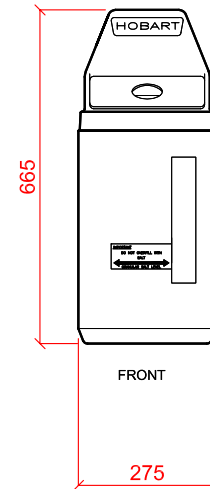
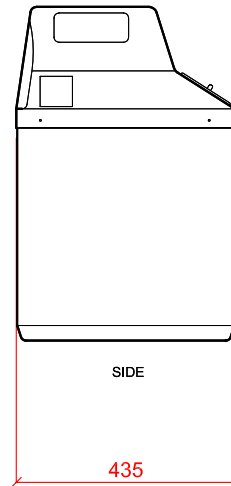


Water Softener Cold Feed

HS2000-11

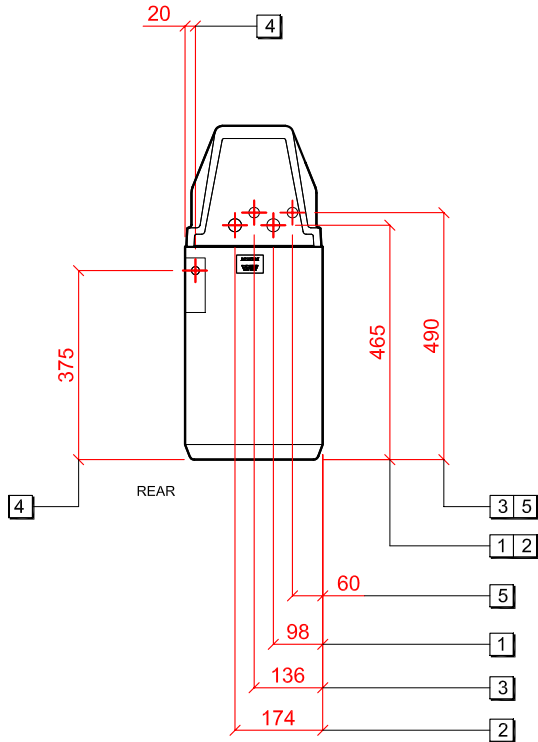

1 2 Water

1. INLET: 3/4" B.S.P. MALE 40°C MAX.
 1.5 TO 8.0 BAR.

2. OUTLET: 3/4" B.S.P. MALE

WATER SUPPLY TO HAVE INDEPENDENT
 ISOLATING VALVE

3 4 Drain

3. DRAIN: 3/4" B.S.P. MALE.

4. OVERFLOW: 1/2" HOSE CONNECTOR

5 Electric Loading

230/50/1
 3 AMP FUSED SPUR.

2 METRE CABLE SUPPLIED.

SPECIAL NOTE:
 ELECTRICAL INSTALLATIONS SHOULD
 COMPLY WITH CURRENT BS REGULATIONS.

Notes

FIXING KITS AND HOSES NOT SUPPLIED.

NOMINAL SALT CAPACITY 25kg

RIGHT TO MAKE NECESSARY CHANGES IS RESERVED