
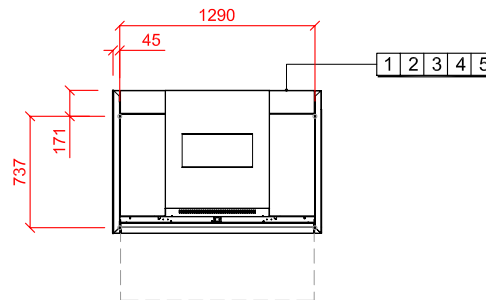
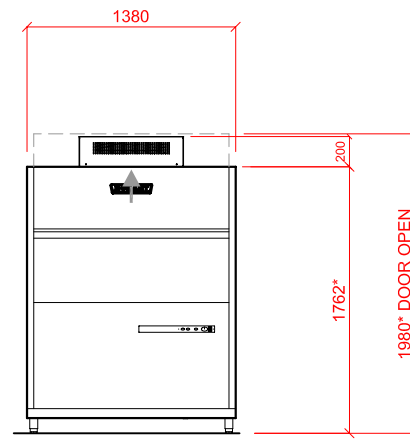


UXT Front Loading Series with In Built Softener and Exhaust Heat Recovery

UXTCS-11

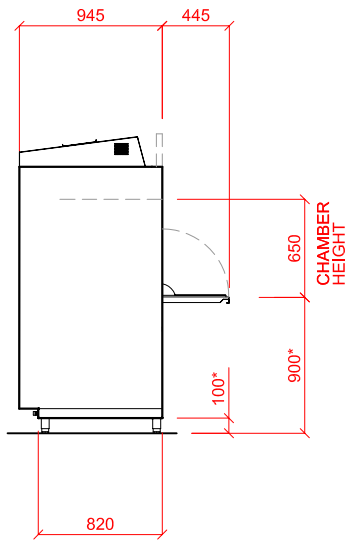

<p>1 Water</p>	<p>2 Drain</p>	<p>3 Electric Loading</p>
<p>22m.m. CONNECTION VIA 1.5 METRE FLEXIBLE HOSE, FEMALE TERMINATION.</p> <p>WATER SUPPLY 10°C @ 0.6 TO 6.0 BAR MAX.</p> <p>INITIAL TANK FILL 120 LITRES.</p> <p>RINSE WATER USAGE 11.0 LITRES PER CYCLE. MAX USAGE 330 LITRES PER HOUR.</p> <p>OUR MACHINES ARE SUPPLIED WITH CLASS 'AA' AIR GAP AS STANDARD.</p> <p>WATER SUPPLY TO HAVE INDEPENDENT ISOLATING VALVE</p>	<p>DRAIN - 2 METRE FLEXIBLE HOSE TO A 40m.m. TRAPPED STANDPIPE 860m.m. A.F.F.L.</p> <p>FLOW RATE 30 LITRES PER MINUTE.</p>	<p>21.0kW 400/50/3 + N + E FUSED AT 35AMPS / PHASE.</p> <p>SUPPLIED WITH 1.8 METRE OF CABLE.</p> <p>SPECIAL NOTE: ELECTRICAL INSTALLATIONS SHOULD COMPLY WITH CURRENT BS REGULATIONS.</p>
	<p>4 5 Other Services</p> <p>RINSE AGENT HOSE - 1.5 METRE FLEXIBLE. DETERGENT HOSE - 1.5 METRE FLEXIBLE.</p>	<p>Notes</p> <p>APPROX WEIGHTS: EMPTY: 315kg's WITH WATER: 463kg's</p> <p>HEIGHTS MARKED * REPRESENT ±15m.m.</p> <p>THIS MACHINE CAN GO AGAINST A WALL i.e. NO CLEARANCE REQUIRED AT REAR OF THE MACHINE</p>

RIGHT TO MAKE NECESSARY CHANGES IS RESERVED