


COMBINATION OVEN
CPLUS SERIES

Electric 2 x 6 level 1/1 Combi oven with Direct Injection

CPLUS-061/1-23

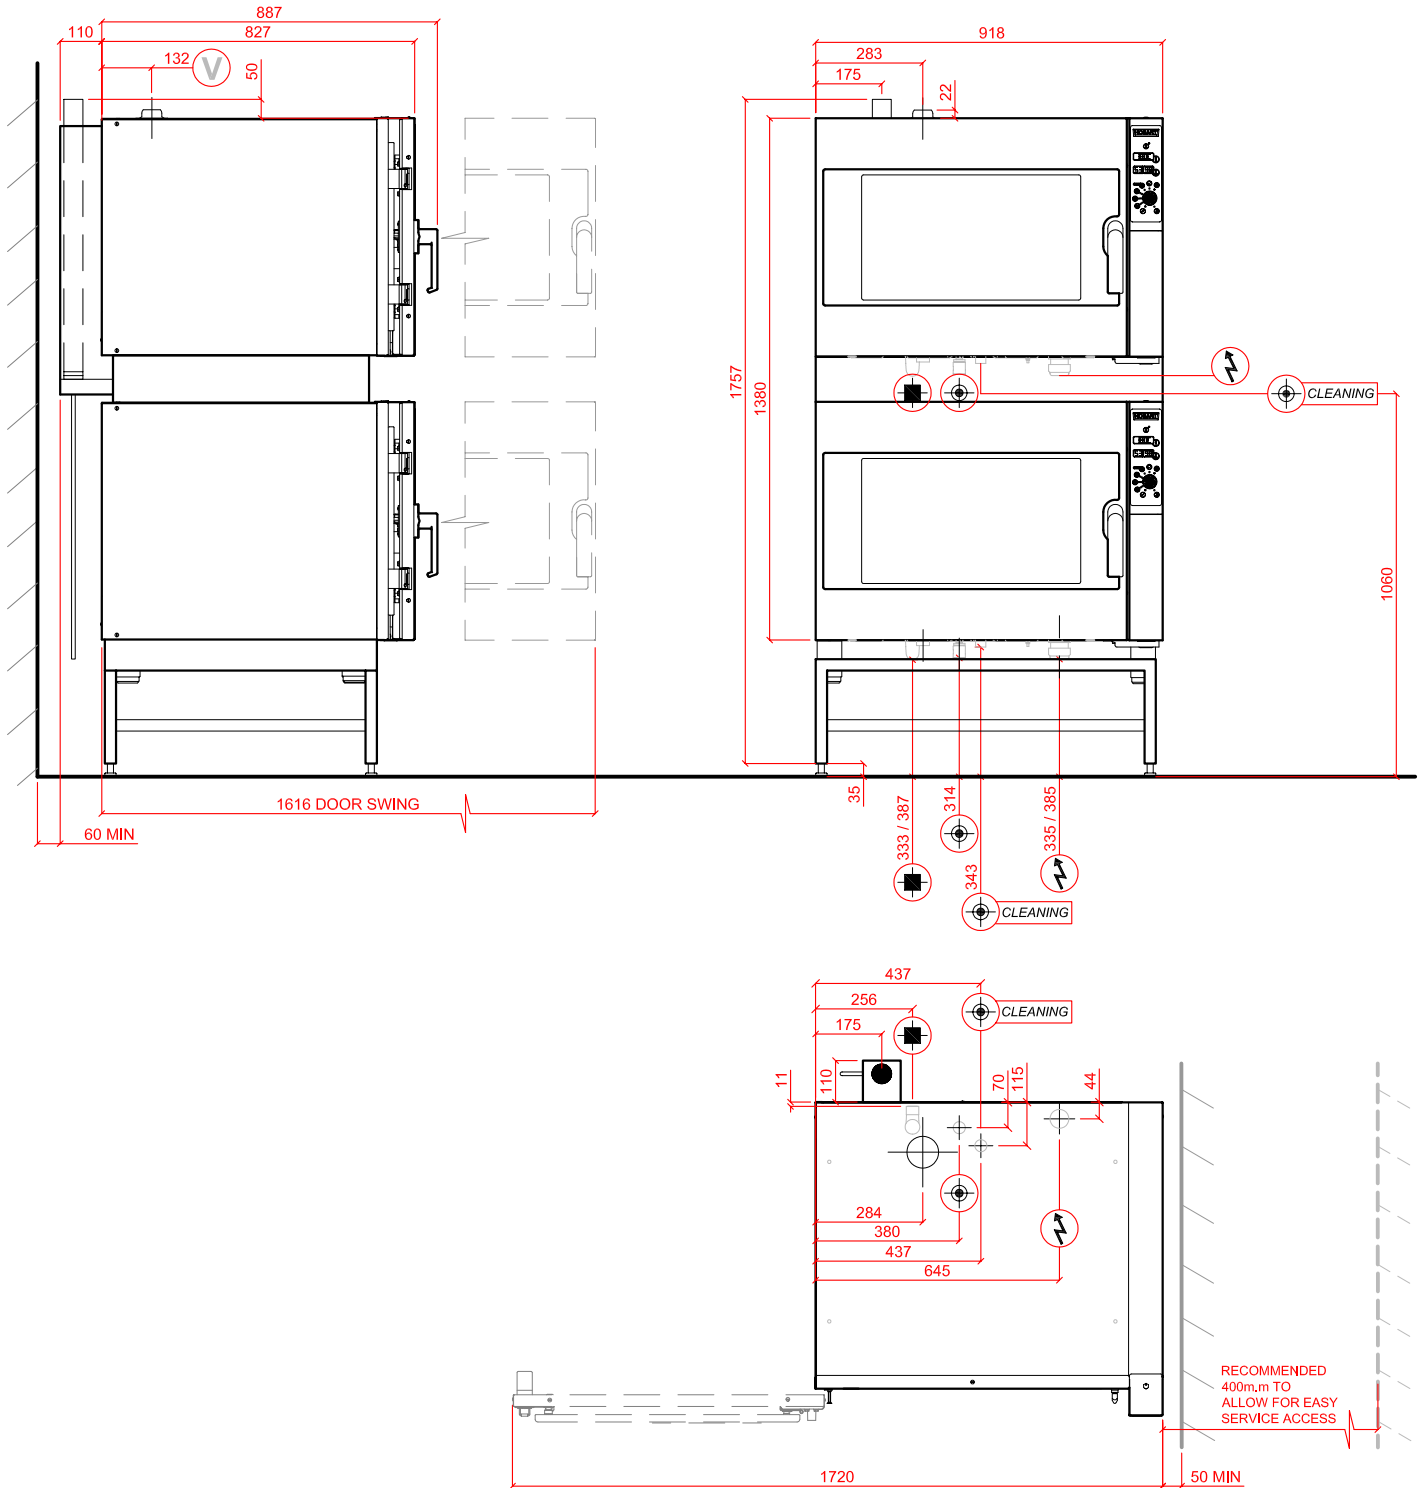

Water	Drain	Electric Loading	Vent Outlet
2 x 3/4" B.S.P. POTABLE WATER. 7.5 LITRE/MIN. 2.0 TO 5.0 BAR PRESSURE MAX TEMP: 25°C (2 TO 8° CLARK MAX)	2 x 1" B.S.P. DRAIN	2 x 9.4kW 400/50/3 + N + E FUSE AT 16 AMPS/PHASE EACH	2 x 44mm Ø RECOMMENDED EXTRACTION FLOW 390m ³ /hour EACH
2 x 3/4" B.S.P. FOR CLEANING	SPECIAL NOTE: DO NOT INSTALL UNIT CLOSE TO HOT APPLIANCES ON CONTROL PANEL SIDE UNIT SHOULD BE LOCATED UNDER A VENTILATION CANOPY. WEIGHT 222kg		
RIGHT TO MAKE NECESSARY CHANGES IS RESERVED			

ELECTRICAL CONNECTION
 WATER CONNECTION
 DRAIN
 VENT OUTLET

PLOT SCALE: 1:20