




**UNDERCOUNTER GLASSWASHERS
GC SERIES**



HOBART UK, SOUTHGATE WAY, ORTON SOUTHGATE, PETERBOROUGH, PE2 6GN
TELEPHONE 0844 888 7777
www.hobartuk.com

Undercounter Glasswasher

GC-21N

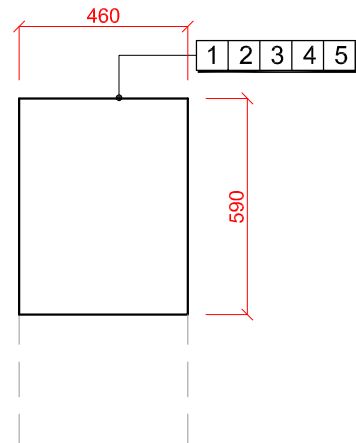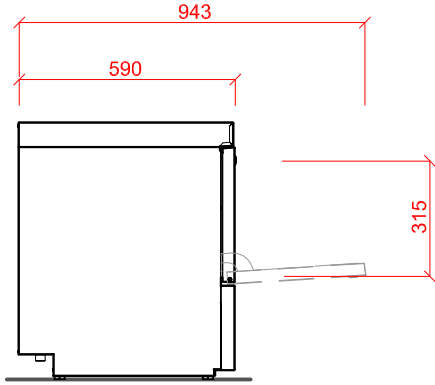

1 Water

22mm CONNECTION VIA 2 METRE FLEXIBLE HOSE, FEMALE TERMINATION.

WATER SUPPLY 10 TO 60°C (2° TO 8° CLARK MAX)
@ 0.5 TO 6.0 BAR MAX.
INITIAL TANK FILL 8 LITRES.

RINSE WATER USAGE 2.3 LITRES PER CYCLE.
MAX USAGE 110 LITRES PER HOUR.

OUR MACHINES ARE SUPPLIED WITH CLASS 'AA' AIR GAP AS STANDARD.

2 Drain

DRAIN - 1.75 METRE FLEXIBLE HOSE TO A 40 mm TRAPPED STANDPIPE 800mm MAX A.F.F.L.

FLOW RATE 30 LITRES PER MINUTE.

4 5 Other Services

RINSE AGENT HOSE - 2.5 METRE FLEXIBLE.

DETERGENT HOSE - 2.5 METRE FLEXIBLE.

3 Electric Loading

2.1kW 230/50/1 FUSED AT 13AMPS
MACHINE SUPPLIED WITH 2.0 METRES OF CABLE.

CONFIGURABLE TO
4.3kW 230/50/1 FUSED AT 20AMPS

Notes

APPROX WEIGHTS:
EMPTY: 50kg's WITH WATER: 64kg's

RIGHT TO MAKE NECESSARY CHANGES IS RESERVED