


Front Loading Utensil Washer

UX-10N

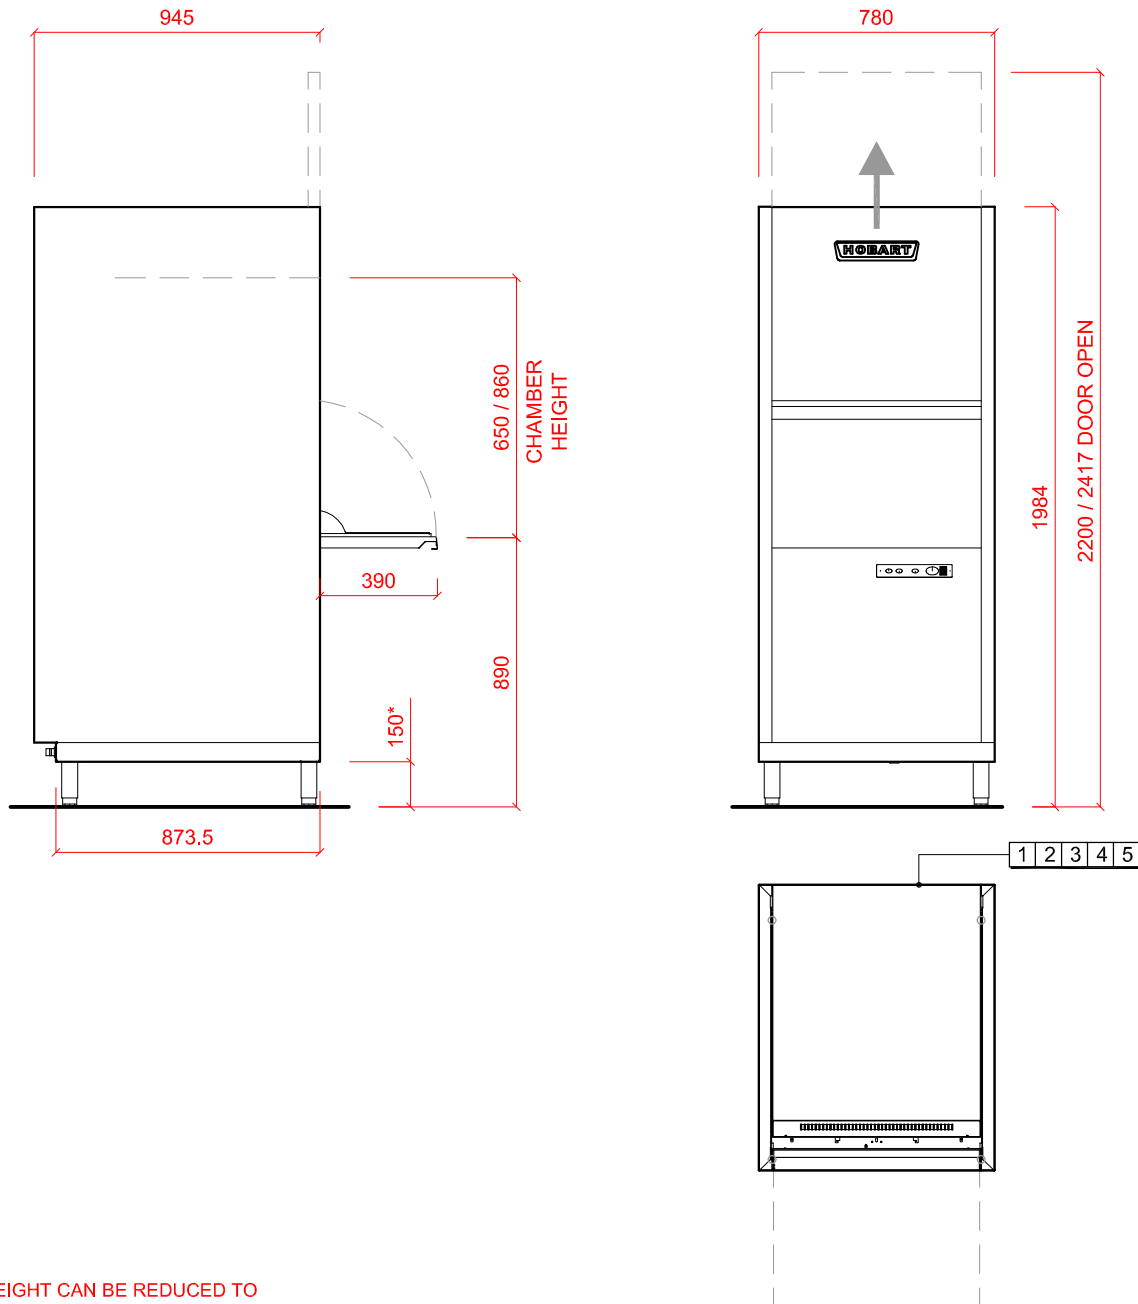

NOTE:
DOOR HEIGHT CAN BE REDUCED TO 2200 BY ADJUSTING DOOR MECHANISM

<p>1 Water</p> <p>22m.m. CONNECTION VIA 1.5 METRE FLEXIBLE HOSE, FEMALE TERMINATION.</p> <p>WATER SUPPLY 15°C TO 60°C (2° TO 8° CLARK MAX) @ 0.5 TO 10 BAR MAX.</p> <p>INITIAL TANK FILL 80 LITRES.</p> <p>RINSE WATER USAGE 4.5 LITRES PER CYCLE. MAX USAGE 135 LITRES PER HOUR.</p> <p>OUR MACHINES ARE SUPPLIED WITH CLASS 'AA' AIR GAP AS STANDARD.</p> <p>WATER SUPPLY TO HAVE INDEPENDENT ISOLATING VALVE.</p>	<p>2 Drain</p> <p>DRAIN - 2 METRE FLEXIBLE HOSE TO A 40 m.m. TRAPPED STANDPIPE 800m.m. A.F.F.L.</p> <p>FLOW RATE 30 LITRES PER MINUTE.</p> <p>4 5 Other Services</p> <p>RINSE AGENT HOSE - 2.5 METRE FLEXIBLE.</p> <p>DETERGENT HOSE - 2.5 METRE FLEXIBLE.</p>	<p>3 Electric Loading</p> <p>15.4kW 400/50/3 + N + E FUSED AT 35AMPS. CONFIGURABLE TO FOR WARM WATER SUPPLY 12.6kW 400/50/3 + N + E FUSED AT 20AMPS.</p> <p>MACHINE SUPPLIED WITH 1.8 METRES OF CABLE.</p> <p>Notes</p> <p>APPROX WEIGHTS: EMPTY: 205kg's</p> <p>HEIGHTS MARKED * REPRESENT ±25m.m.</p>
---	--	---