


Pass Through Utensil Washer

UXTH-10N

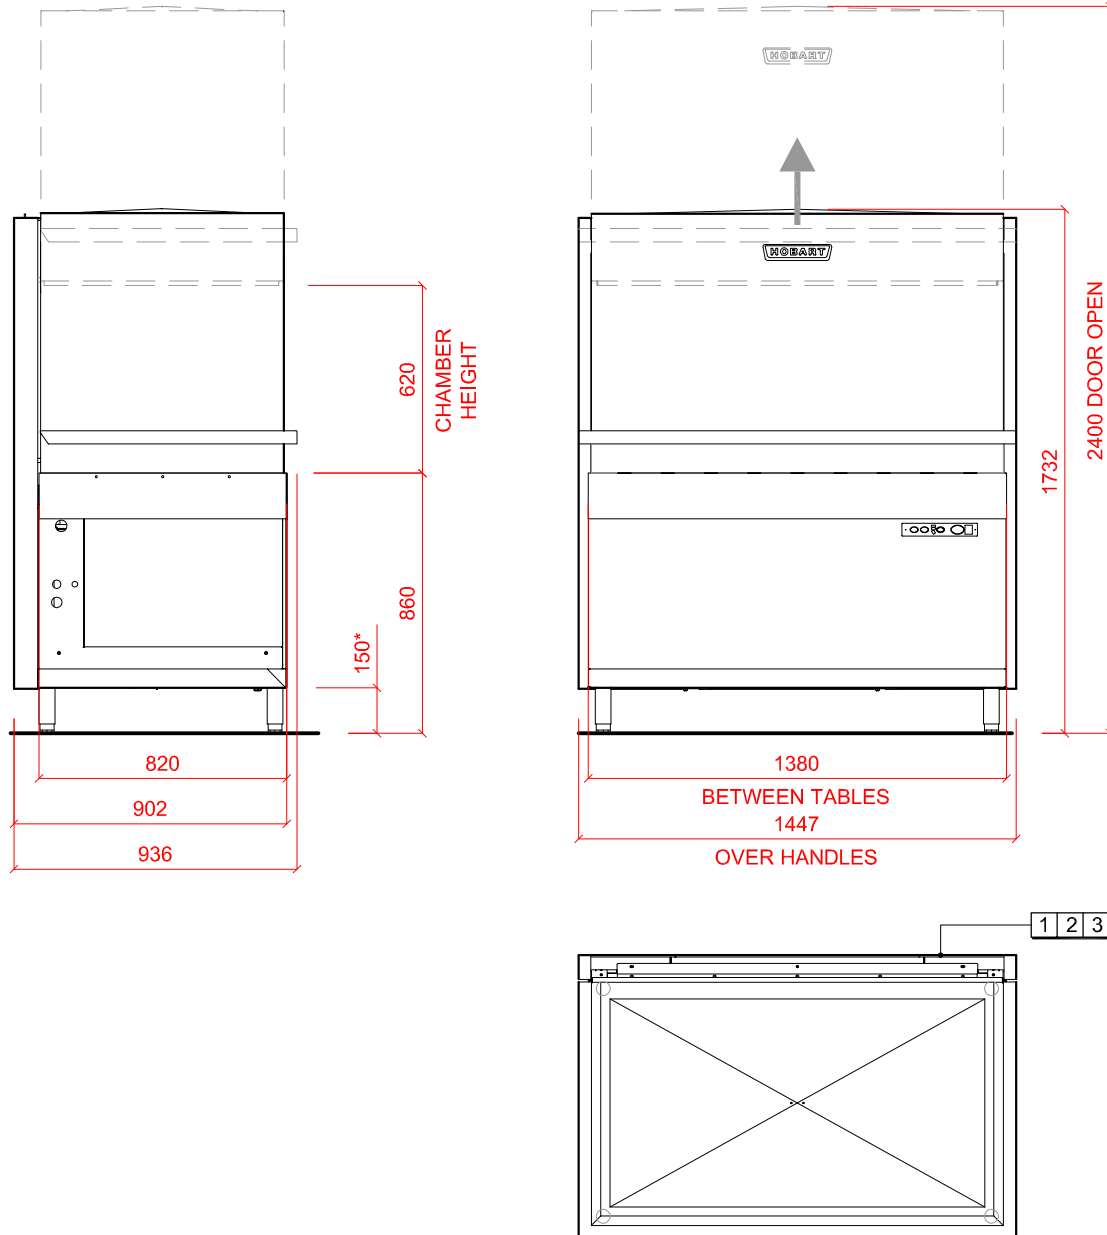

<b>1</b>	<b>Water</b>
<p>22m.m. CONNECTION VIA 1.5 METRE FLEXIBLE HOSE, FEMALE TERMINATION.</p> <p>WATER SUPPLY 15°C TO 60°C (2° TO 8° CLARK MAX) @ 0.5 TO 10 BAR MAX.</p> <p>INITIAL TANK FILL 130 LITRES.</p> <p>RINSE WATER USAGE 8.0 LITRES PER CYCLE. MAX USAGE 240 LITRES PER HOUR.</p> <p>OUR MACHINES ARE SUPPLIED WITH CLASS 'AA' AIR GAP AS STANDARD.</p> <p>WATER SUPPLY TO HAVE INDEPENDENT ISOLATING VALVE.</p>	

<b>2</b>	<b>Drain</b>
<p>DRAIN - 2 METRE FLEXIBLE HOSE TO A 40 m.m. TRAPPED STANDPIPE 800m.m. A.F.F.L.</p> <p>FLOW RATE 30 LITRES PER MINUTE.</p>	

<b>4</b> <b>5</b>	<b>Other Services</b>
<p>RINSE AGENT HOSE - 2.5 METRE FLEXIBLE.</p> <p>DETERGENT HOSE - 2.5 METRE FLEXIBLE.</p>	

<b>3</b>	<b>Electric Loading</b>
<p>21.2kW 400/50/3 + N + E FUSED AT 50AMPS. <b>CONFIGURABLE TO</b> FOR WARM WATER SUPPLY 15.7kW 400/50/3 + N + E FUSED AT 35AMPS.</p> <p>MACHINE SUPPLIED WITH 1.8 METRES OF CABLE.</p>	

<b>Notes</b>	
<p>APPROX WEIGHTS: EMPTY: 364kg's</p> <p>HEIGHTS MARKED * REPRESENT ±25m.m.</p> <p>OPERATING HEIGHT FOR TABLE: 860m.m.</p>	