



The benchmark for quality and innovation



Glasswashers

Undercounter Glasswashing Machines

Redefining the Industry Standard for Glasswashing

First impressions last and clean, sparkling glassware is a vital component in the delivery of the perfect drink experience to your customers.

No one understands the value of this more than Hobart. By extensively researching all of the major hospitality business segments including bars, leisure, restaurants and hotels, Hobart have listened to and understand the key requirements of the market.

This knowledge has enabled Hobart to develop the most efficient and effective range of glasswashers on the market – they all incorporate thoughtful features which ensure ease of use and cleaning combined with clever innovations to guarantee exceptionally consistent results and low running costs.

GC

- 400 x 400mm basket
- Up to 760 glasses per hour
- Built in softener option available
- 2 models available

GXH/GX

- 500 x 500mm basket
- Up to 1500 glasses per hour
- INTENSIV wash system
- Built in softener option available

GXP

- 500 x 500mm basket
- Up to 1500 glasses per hour
- INTENSIV4 wash system with drying cycle
- Hygiene programme
- Built in softener option available



Further Information

This brochure aims to provide you with everything you need to know to assist your purchasing decision, including technical specifications for our range of glasswashers.

If you are left with any queries or wish to see a Hobart representative, don't hesitate to call the Hobart Customer Services team – you'll find contact details on the back of the brochure.

GC

- A compact and efficient 400 x 400mm basket glasswasher capable of delivering up to 760 sparkling clean glasses per hour.

Supplied as standard with:
1 x 4 division Tilt Rack

Ease of operation

- SMARTRONIC single button control with colour coded status sequence. Simple to use and understand
- Easy to clean wash tank and chamber with smooth, rounded corners and polished interior
- Only 6 removable items for cleaning
- Automatic self flushing drain cycle on machine shut down
- Full width hydraulically damped counterbalanced door

Consistently outstanding wash results

- **INTENSIV** - 3 stage wash process incorporates a pre-wash function which removes 20-40% more debris
- **ECOTHERM** - Maintains wash temperature above 63°C for optimum detergent performance
- **VECTOR** Wide Angle Wash Jets - Advanced design delivers a powerful, searching wash action eliminating any "masked" areas
- Selectable extended rinse cycle (3.2 litres) for tall or stemmed glassware
- Interlocked strainer ensures correct location and operation of filter system
- Wash pump soft start feature protects ware and reduces shock to components

Energy saving features

- **ACCURINSE** uses just 1.9 litres of fresh water per cycle saving up to 34% on water, energy, detergent and rinse aid costs
- **GENIUS X²** removes 20-40% more debris from the wash water and saves up to 34% on detergent usage
- Wash tank capacity of just 8 litres, saves on water and energy

Using the correct glass racks will significantly improve washed results. A tilted and divided rack promotes rapid drying and safer handling of glasses and helps eliminate breakages.



SMALL MODEL - LARGE SPECIFICATION

SMALL FOOTPRINT

The GC Glasswasher provides a level of specification normally only found in larger models, including as standard:

Rinse pump for consistent results

Drain pump for simple and rapid emptying of machine

Detergent and rinse aid dosing

Single button operation for ease of use



GXH/GX Glasswasher

GXH

- A high performance, high capacity glasswasher combining quality and innovation to deliver up to 1500 sparkling clean glasses per hour.

GX

- A Low profile high performance, high capacity glasswasher, ideally suited for under bar installation

Supplied as standard with:
1 x 4 Division Rack

Ease of operation


- **SMARTRONIC** simple button control with colour coded status sequence.
- Easy to clean wash tank and chamber with smooth, rounded corners and polished interior
- Only 6 removable items for cleaning
- Automatic self flushing drain cycle on shut down
- Full width hydraulically damped counterbalanced door
- Audible status indicator advising when chemicals and detergents are running low

Consistently outstanding wash results

- **INTENSIV** - 3 stage wash process incorporates a pre-wash function which removes 20-40% more debris
- **ECOTHERM** - Maintains wash temperature above 63°C for optimum detergent performance
- **VECTOR** Wide Angle Wash Jets - Advanced design delivers a powerful, searching wash action eliminating any "masked" areas
- Selectable extended rinse cycle (4 litres) for tall or stemmed glassware
- Interlocked strainer ensures correct location and operation of filter system
- Wash pump soft start feature protects ware and reduces shock to components

Energy saving features

- **ACCURINSE** uses just 2.5 litres of fresh water per cycle saving up to 30% on water, energy, detergent and rinse aid costs
- **GENIUS X²** removes 20-40% more debris from the wash water and saves up to 40% on detergent usage
- Wash tank capacity of just 10.8 litres, saves on water and energy

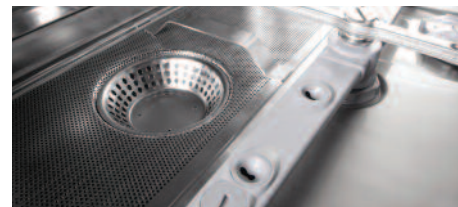

POWERFUL WASHING

Washing efficiency depends largely on the distribution of the detergent solution and the avoidance of any masked areas.

Hobart VECTOR wash jets provide a substantially broader and more precise spraying pattern. Compared with conventional and fixed arm systems masking is avoided and the wash result, especially in the corners, is dramatically improved.

GXP

- Featuring the **INTENSIV4** wash system which incorporates an active drying cycle. GXP takes glasswashing technology to a new dimension, light years ahead of any other glasswasher on the market.

Supplied as standard with:
1 x 4 Division Rack

Ease of operation

- **SMARTRONIC** single button control with unique colour coded sequence and "countdown" indication of cycle status. Simple to use and understand
- **COMPLETE** hygiene programme thoroughly cleans wash chamber and wash system
- Easy to clean wash tank and chamber with smooth, rounded corners and polished interior
- Only 6 removable items for cleaning
- Automatic self flushing drain cycle on machine shut down
- Audible indication of machine status, ie. cycle complete, low salt, low chemicals
- Full width hydraulically damped counterbalanced door

Consistently outstanding wash results

- **INTENSIV4** - 4 stage wash process featuring pre-wash, wash, rinse and a unique drying cycle
- **ECOTHERM** - Maintains wash temperature above 63°C for optimum detergent performance
- **VECTOR** Wide Angle Wash Jets - Advanced design delivers a powerful, searching wash action eliminating any "masked" areas
- Improved drying programme with cycle time display
- Deep Clean cycle - Occasional cycle for cleaning of very heavily soiled glassware
- Interlocked strainer ensures correct location and operation of filter system
- Wash pump soft start feature protects ware and reduces shock to components



ADVANCED TECHNOLOGY

Hobart GXP models feature a unique 4 stage cleaning programme incorporating a unique drying cycle as standard.

This feature delivers 'ready to use' glassware and eliminates steam escape when the door is opened.


Energy Saving Features

Energy saving features

- **ACCURINSE** uses just 2.5 litres of fresh water per cycle saving up to 30% on water, energy, detergent and rinse aid costs
- **GENIUS X²** removes 20-40% more debris from the wash water and saves up to 40% on detergent usage
- Wash tank capacity of just 10.8 litres, saves on water and energy

Advanced GXP features

- Unique integral dryer provides rapid and effective drying of ware in just 3 minutes. Eliminates steam escape when door is opened

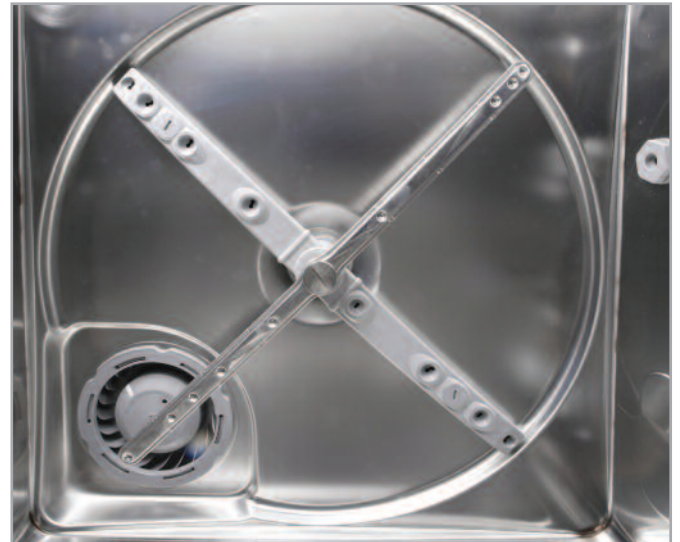


DRYER FAN

- Single button indicates progress of cycle
- Handle illuminates in addition to single button to show machine status



CYCLE STATUS INDICATION


- The hygiene programme using Hobart INTENSIV tablets removes stubborn deposits and cleans the whole wash system leaving the machine clean and smelling fresh

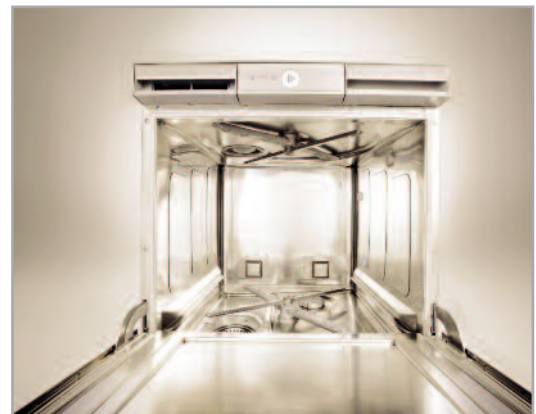

RINSE AID DRAWER


MODEL		GC	GX/GXS	GXH/GXHS	GXP/GXPS	
WATER	Water Connection	3/4" BSP	3/4" BSP	3/4" BSP	3/4" BSP	
	Water Pressure	0.6-6.0 Bar	0.6-6.0 Bar	0.6-6.0 Bar	0.6-6.0 Bar	
	Water Temperature	max. 60°C	max. 60°C	max. 60°C	max. 60°C	
	Water Consumption Per Cycle	1.9 Litres	2.5 Litres	2.5 Litres	2.5 Litres	
	Wash Tank Volume	8 litres	10.8 litres	10.8 litres	10.8 litres	
Hose Length		2000mm	2000mm	2000mm	2000mm	
WASTE	Drain Outlet (pumped)	28mm diameter	28mm diameter	28mm diameter	28mm diameter	
	Drain Hose Length	1750mm	2000mm	2000mm	2000mm	
ELECTRIC	Electrical Loading	2.1kW (1 x 13 Amp)	7.7kW (3 x 16 Amp)	7.7kW (3 x 16 Amp)	7.7kW (3 x 16 Amp)	
	Switchable to:-	4.3kW (1 x 20 Amp)	5.6kW (1 x 25 Amp)	5.6kW (1 x 25 Amp)	5.6kW (1 x 25 Amp)	
			2.9kW (1 x 13 Amp)	2.9kW (1 x 13 Amp)	2.9kW (1 x 13 Amp)	
Pump Rating		0.1kW	0.6kW	0.6kW	0.6kW	
Power Cable Length		2000mm	2000mm	2000mm	2000mm	
OTHER	Detergent Hose Length	2500mm	2500mm	2500mm	2500mm	
	Rinse Aid Hose Length	2500mm	2500mm	2500mm	Integral container	
	Programme (secs)	P01	75	60	60	60
		P02	120	90	90	90
		P03	120 (Extended Rinse)	120 (Extended Rinse)	120 (Extended Rinse)	120 (Extended Rinse)
	HYG programme (secs)	-	-	-	600	
	Rack Size	400 x 400mm	500 x 500mm	500 x 500mm	500 x 500mm	
	Noise Level	62dB (A)	63dB (A)	63dB (A)	63dB (A)	
Supplied As Standard With		1 x 4 Division Glass Rack	1 x 5 Division Glass Rack	1 x 5 Division Glass Rack	1 x 5 Division Glass Rack	

Technical specification for the GC

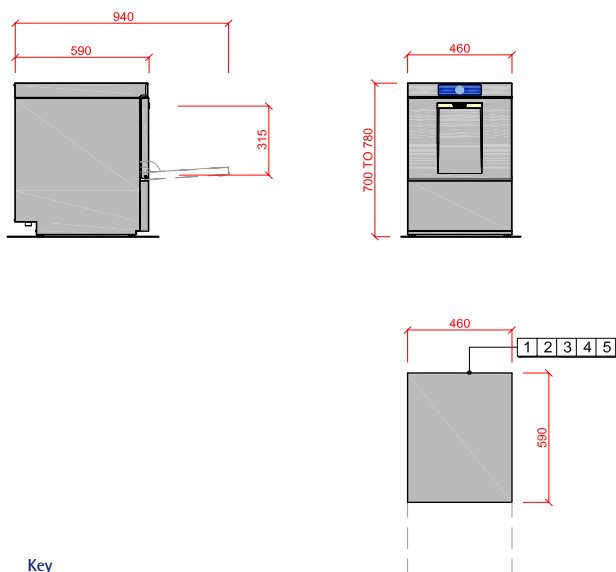


- Key
 For all models
 1. Fresh Water
 2. Drain
 3. Electrics
 4. Detergent
 5. Rinse Agent

Technical specification for the GX/GXH/GXP

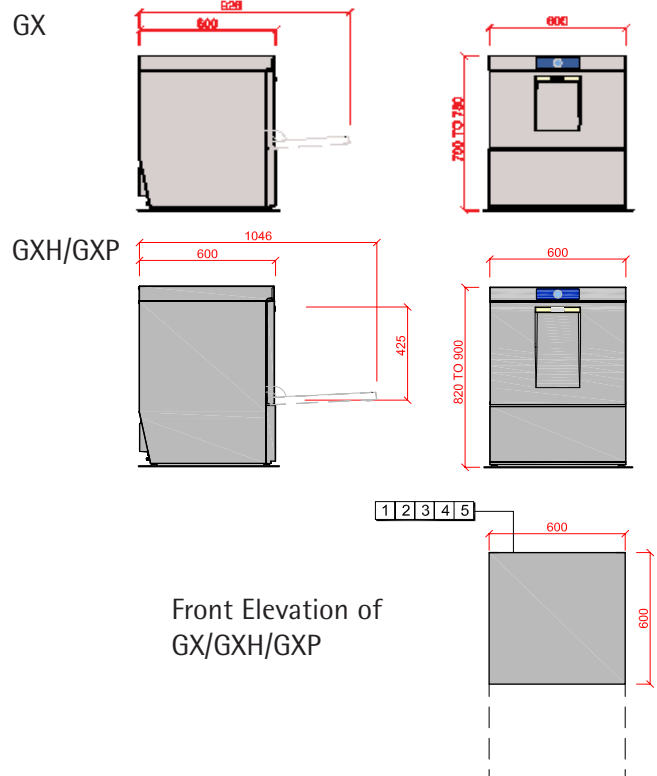

Front Elevation of GX/GXH/GXP



HOBART

The benchmark for quality and innovation

0844 888 7777

Rol 01246 0248

Hobart UK, 51 The Bourne, Southgate, London N14 6RT. Fax No. 020 8886 0450
www.hobartuk.com